



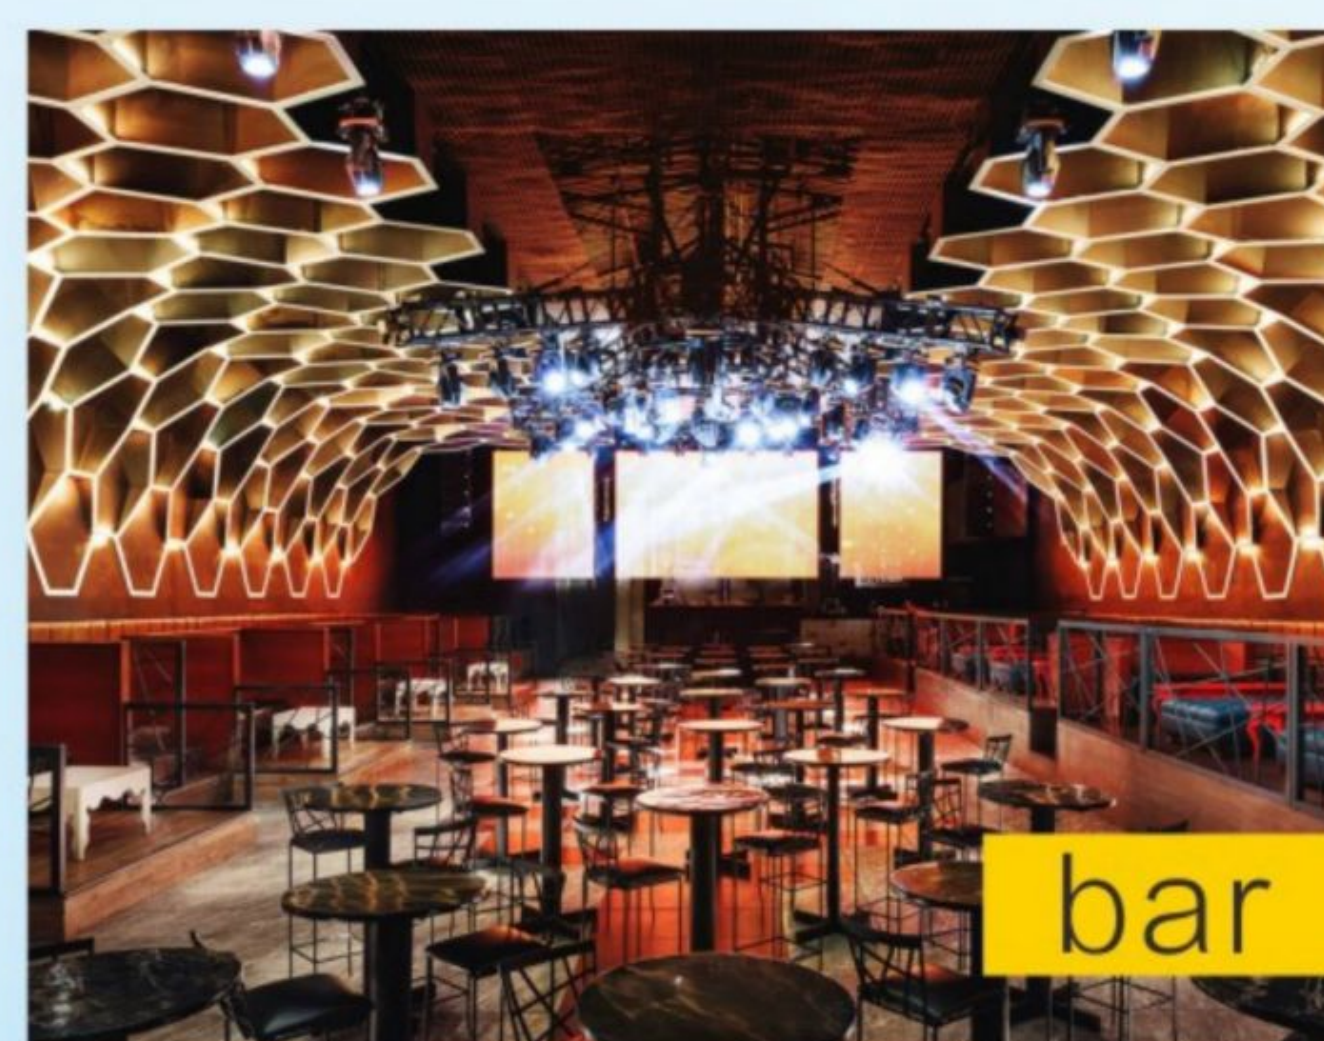

Filament lamp series

- Energy Saving
- Durable
- Healthy Eye Care

Applicable to various places

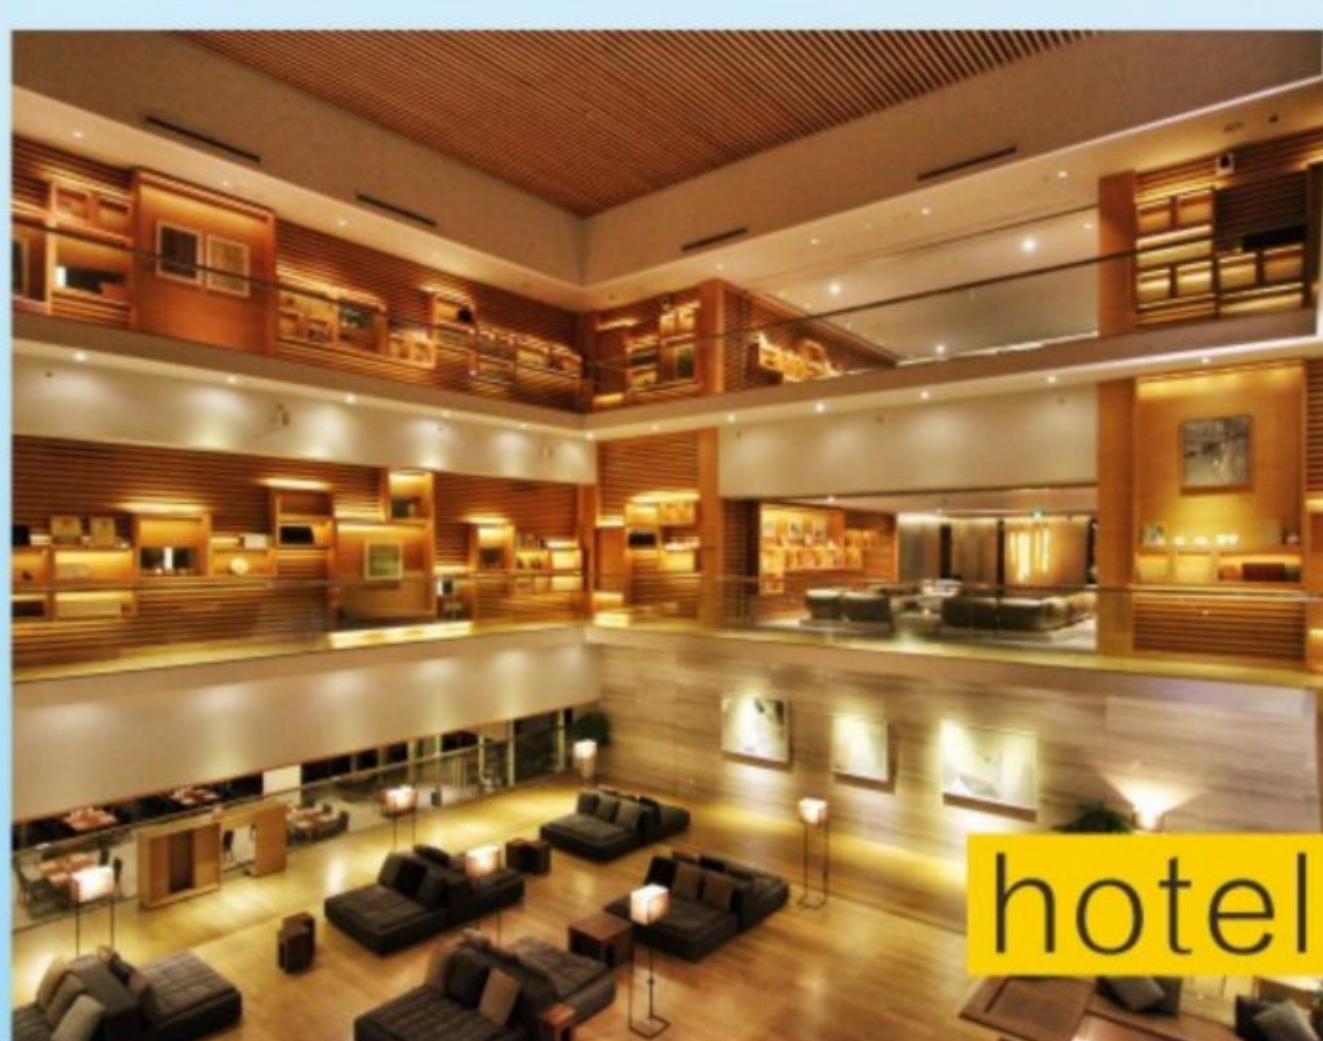




LED FILAMENT LAMP

All items can be with straight/soft led filament

C35

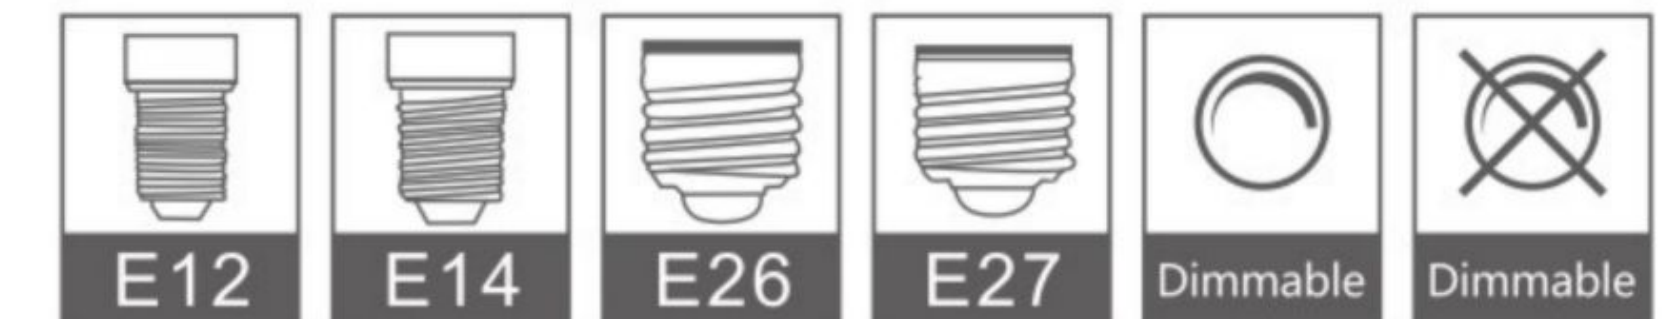

Voltage	Watts	Lumino us Flux	CCT	Angle	Type /pcs	Power Factor	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600	2000/2700 4000/6500	360°	Filament /6	0.5	80	60

C35L



Voltage	Watts	Lumino us Flux	CCT	Angle	Type /pcs	Power Factor	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600	2000/2700 4000/6500	360°	Filament /6	0.5	80	60

G45




Voltage	Watts	Lumino us Flux	CCT	Angle	Type /pcs	Power Factor	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600	2000/2700 4000/6500	360°	Filament /6	0.5	80	60

A60




Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75

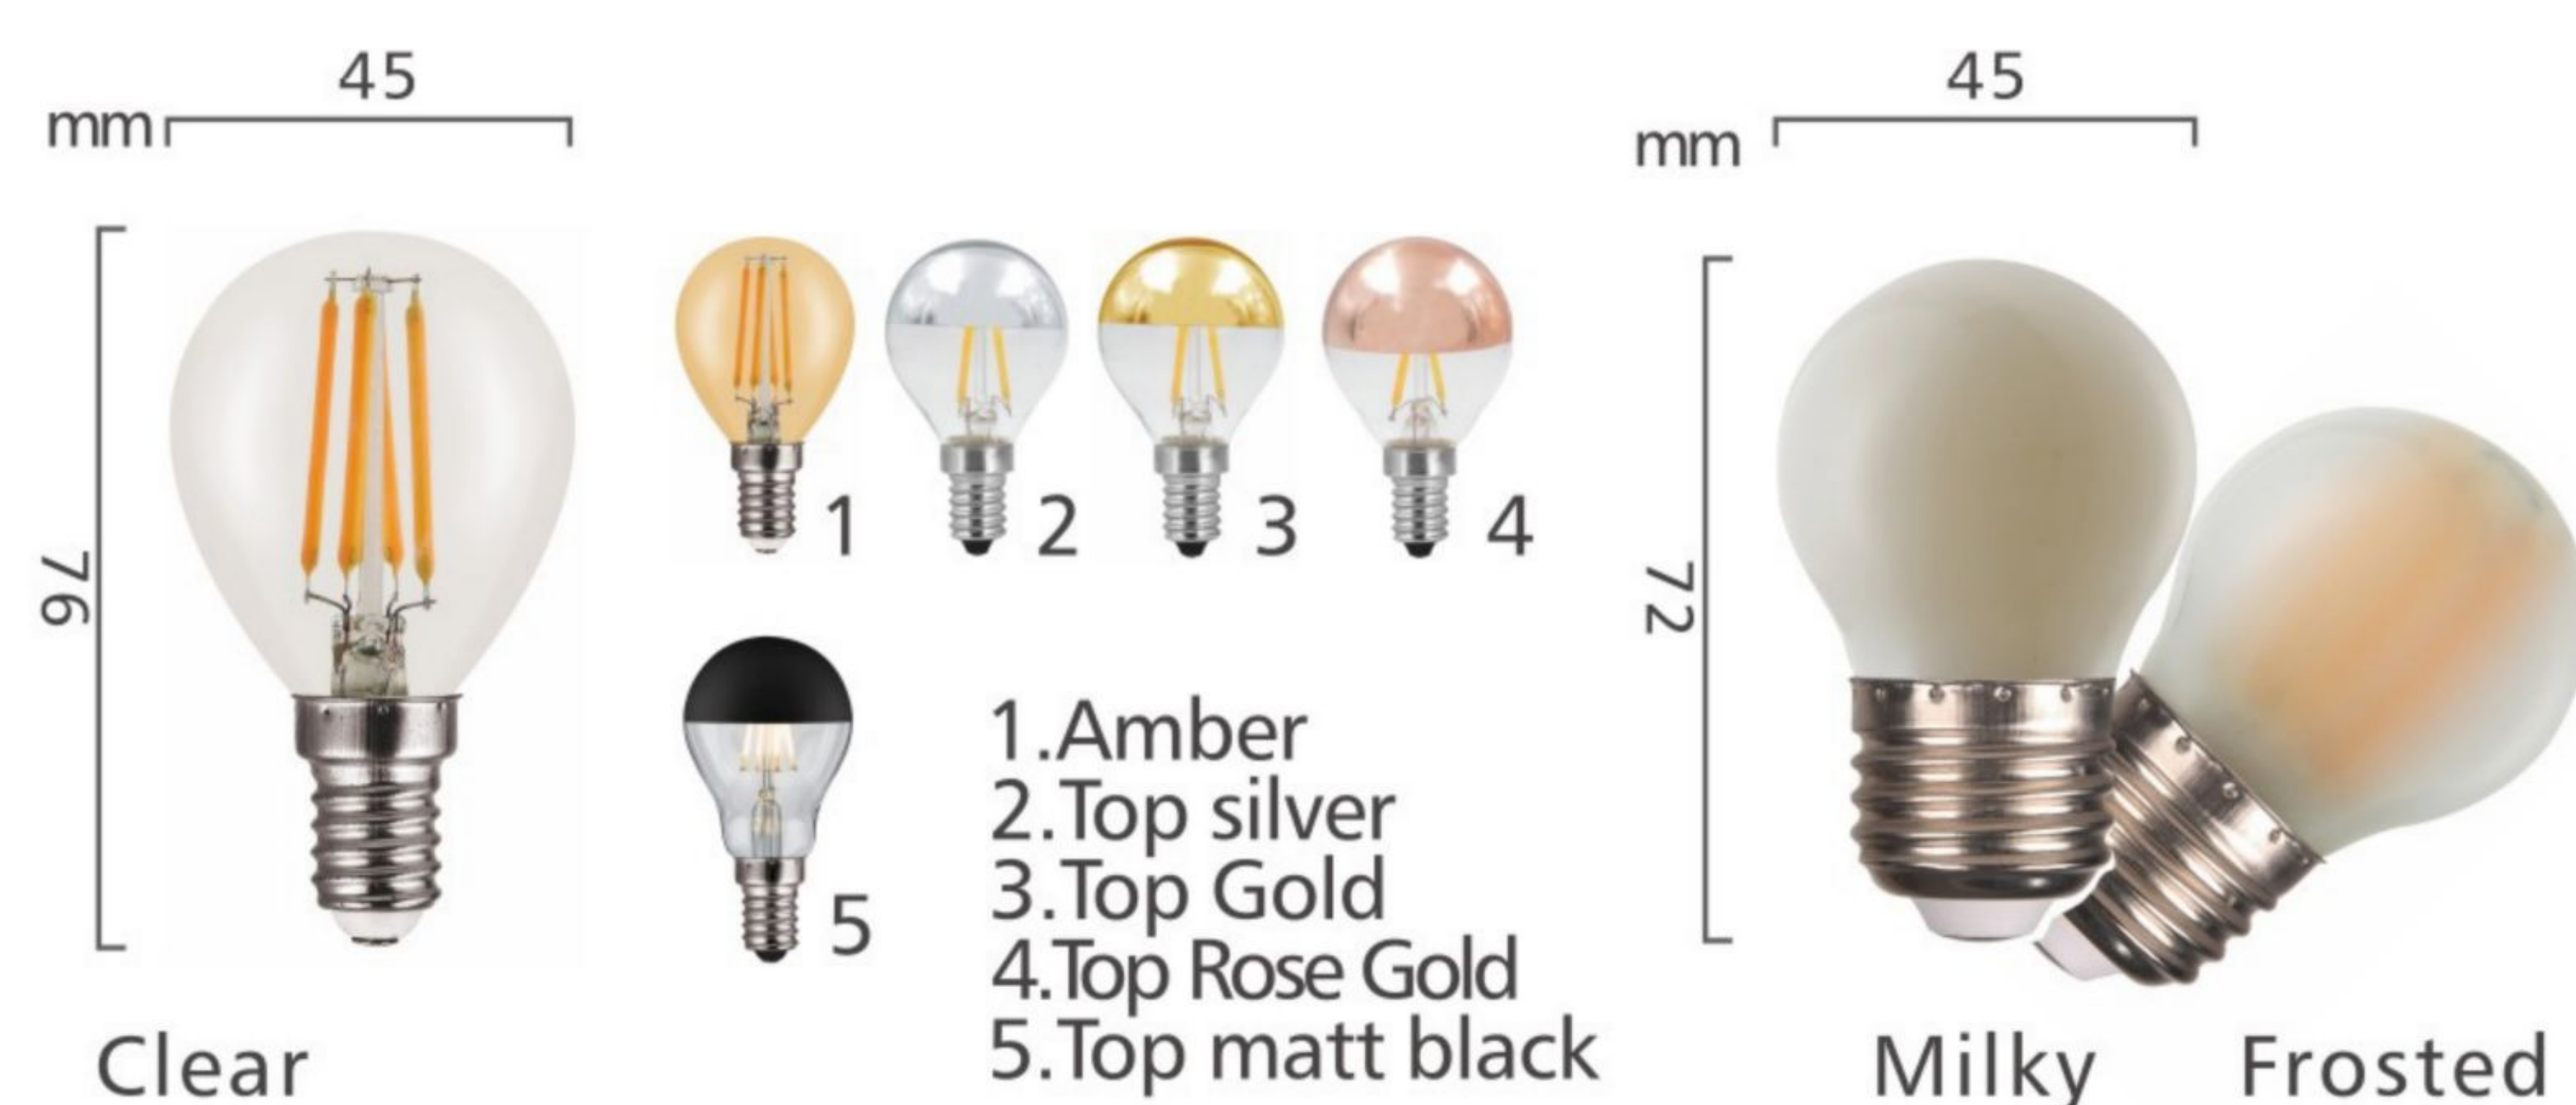



LED FILAMENT LAMP

All items can be with straight/soft led filament

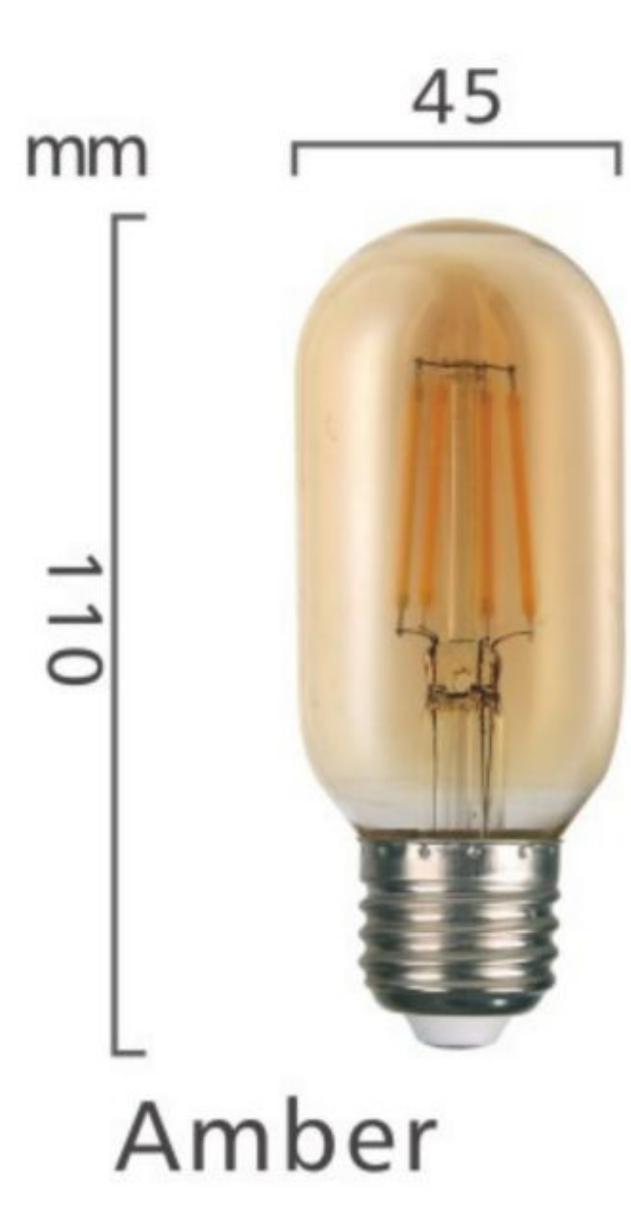

ZS80



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75

ZS95




Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75

ZS125



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75

T45/T25

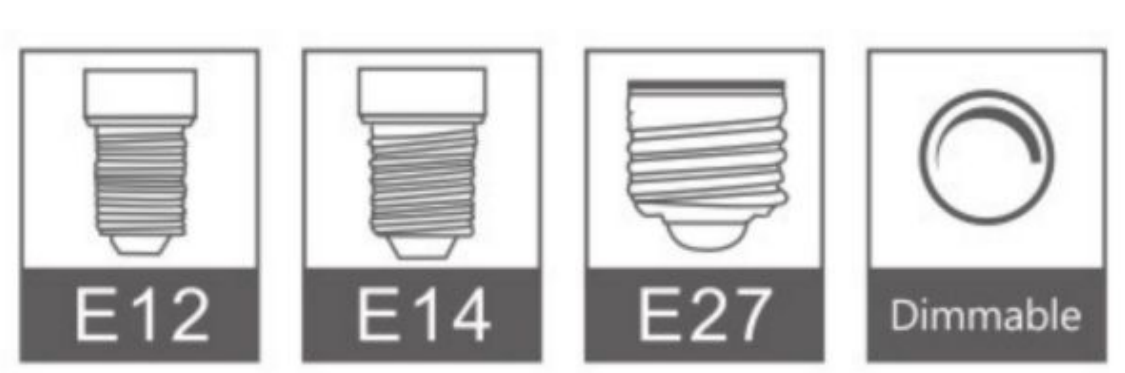

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	2	200±10%	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40



LED FILAMENT LAMP

All items can be with straight/soft led filament

ST48/ST64



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75

G80




Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100

G95



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100

G125

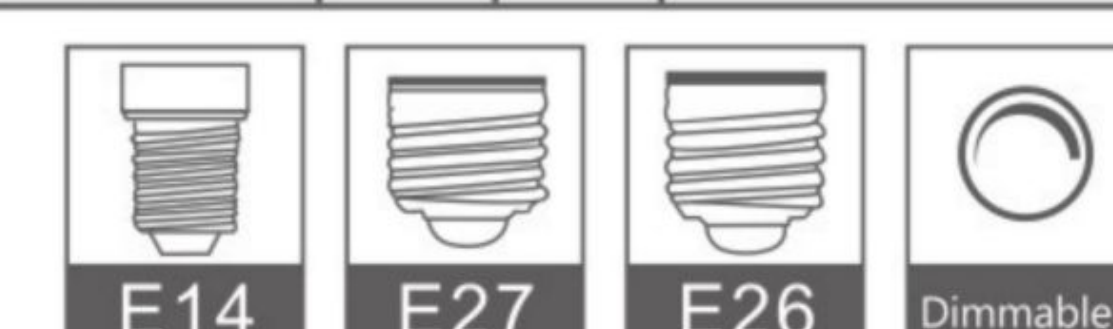


Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100






LED FILAMENT LAMP

All items can be with straight/soft led filament

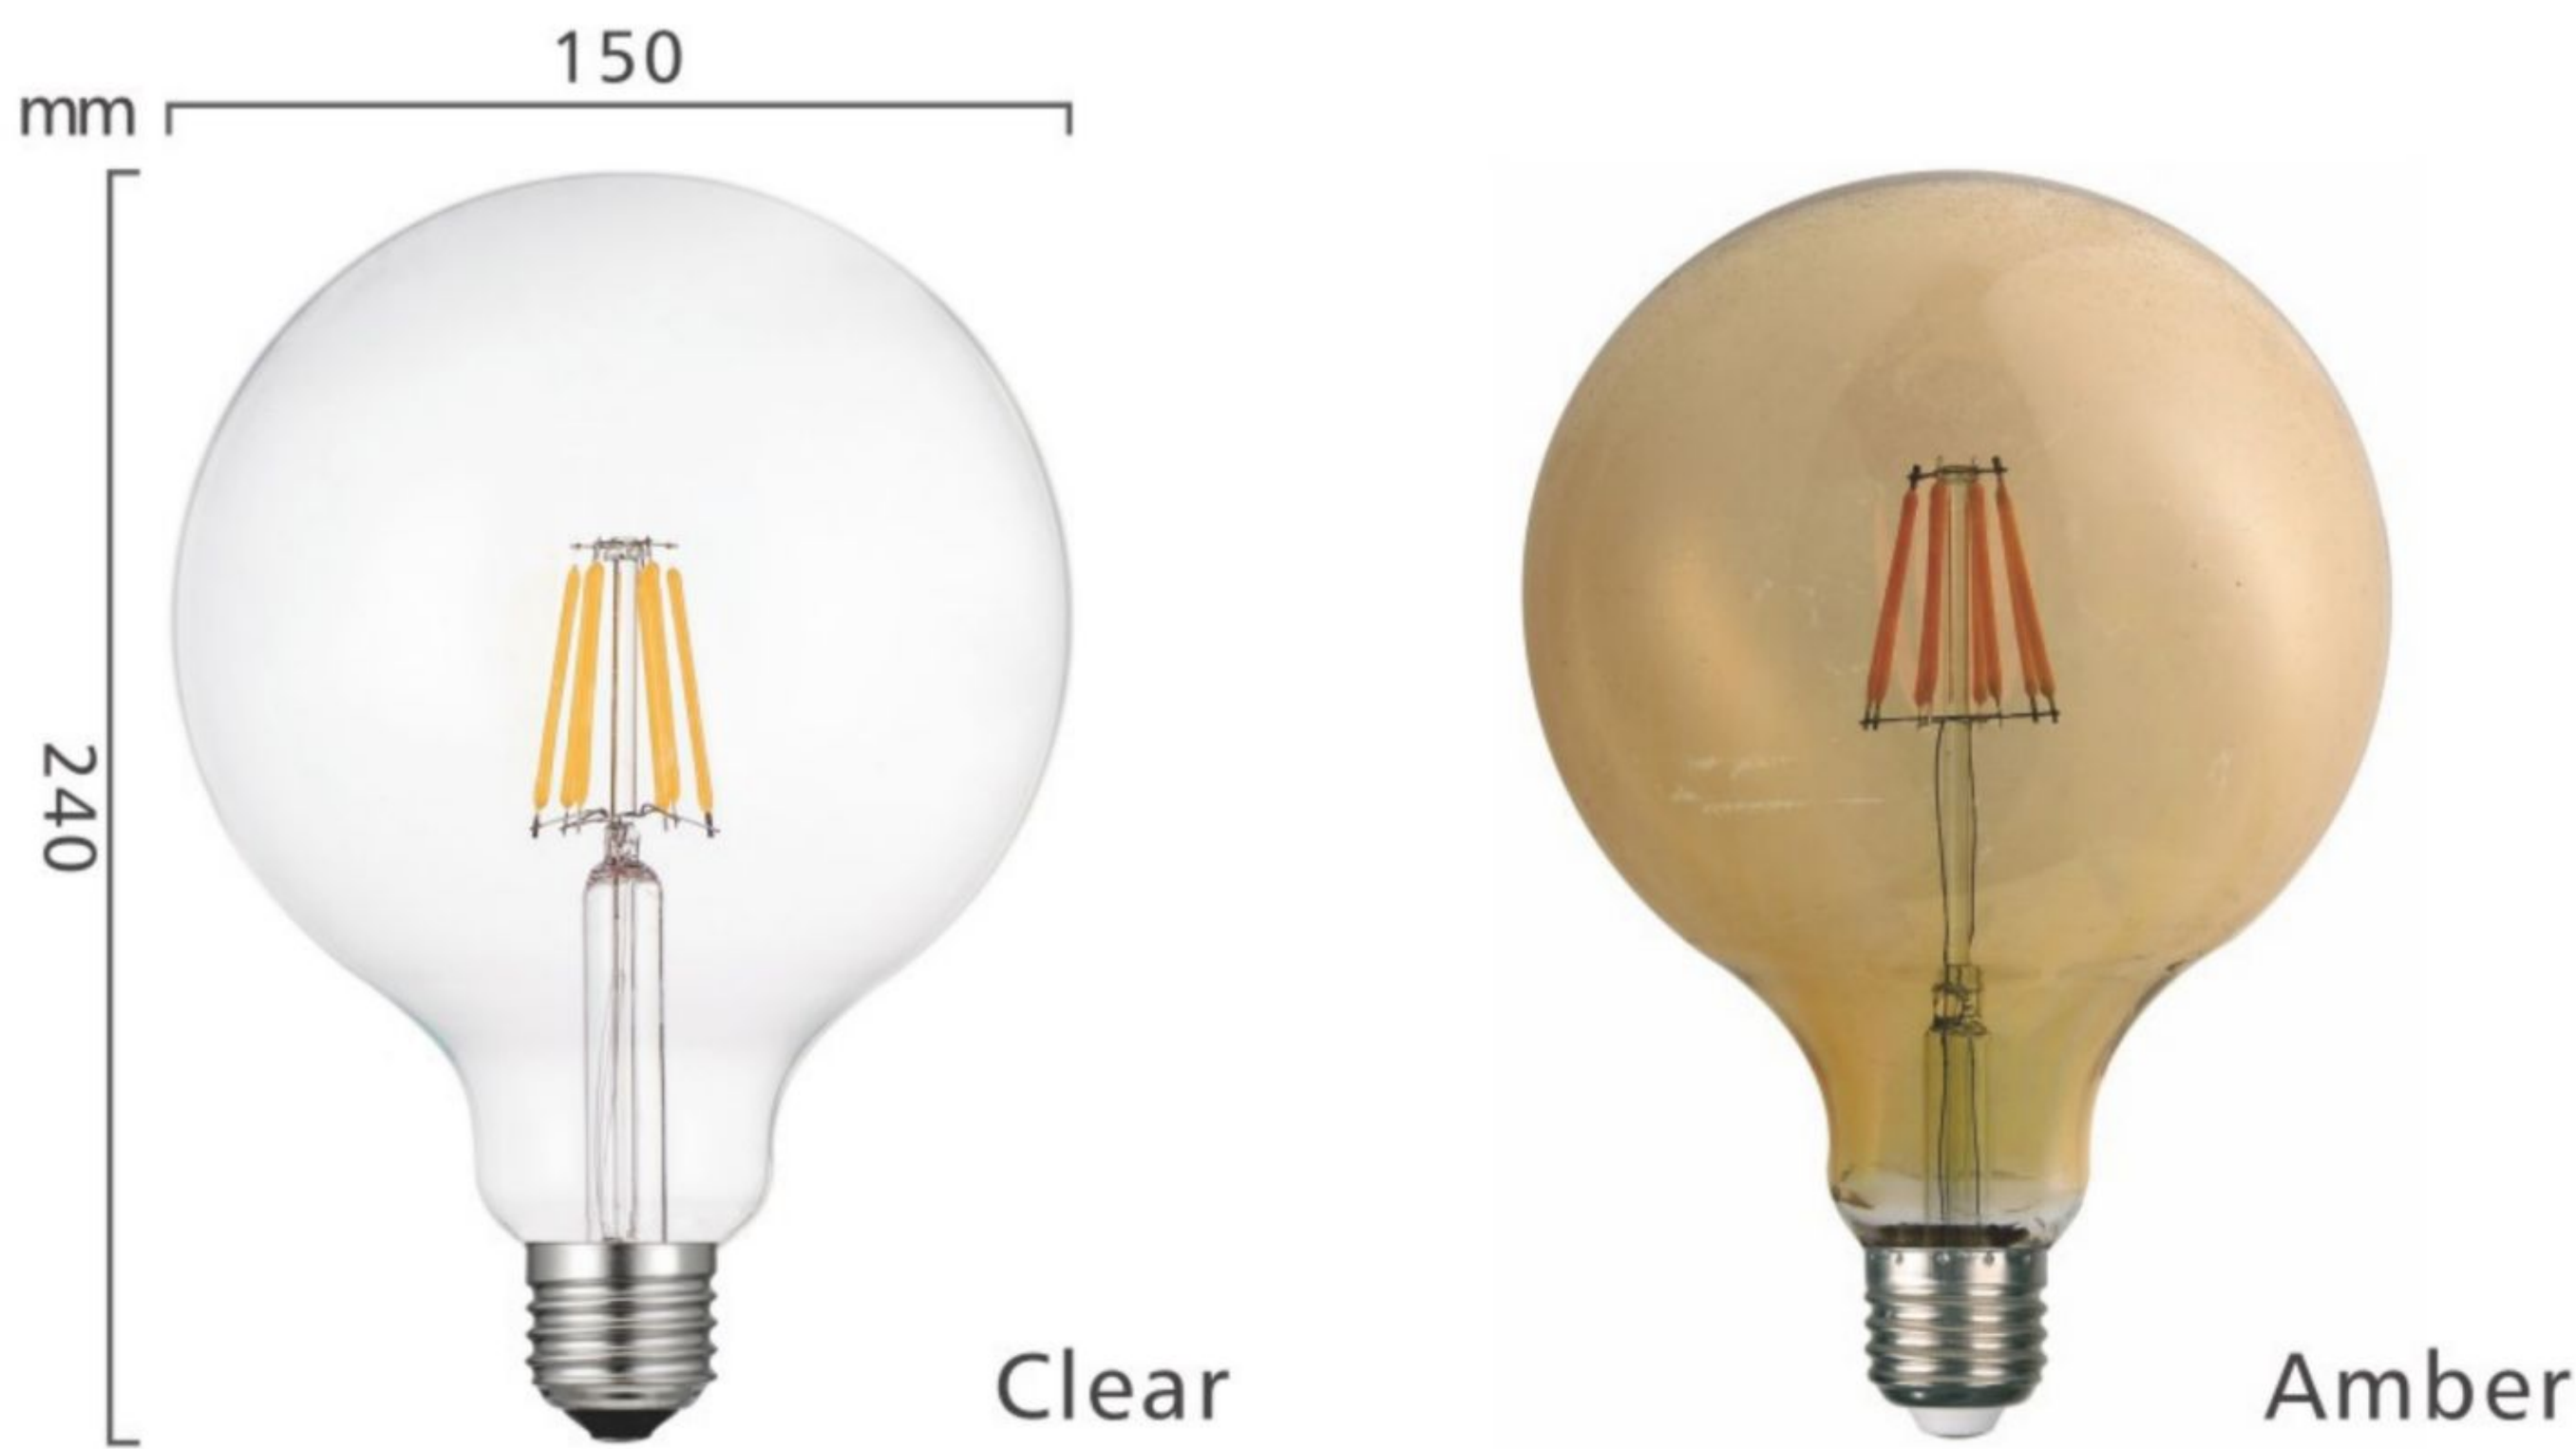

G150

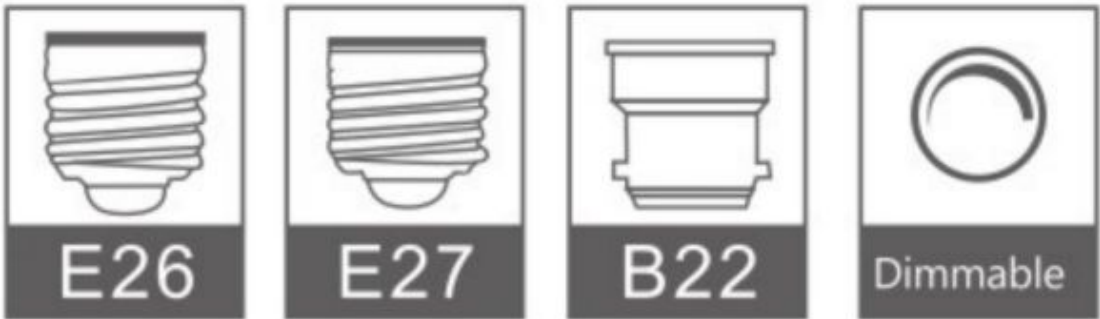

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	10	1000±10%	2000/2700 4000/6500	360°	Filament /10	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100



G180



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75



G200



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75




LED FILAMENT LAMP

All items can be with straight/soft led filament



Amber

G300

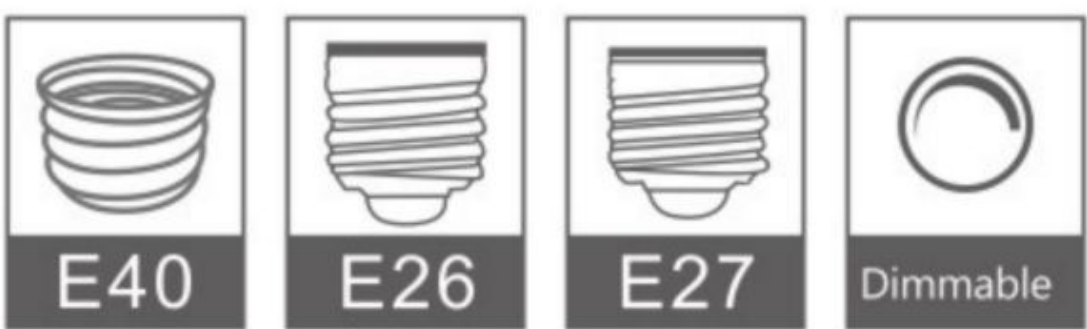

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



Amber

G380



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	20
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	40
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	60
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80




R80

R63

R50

R Series

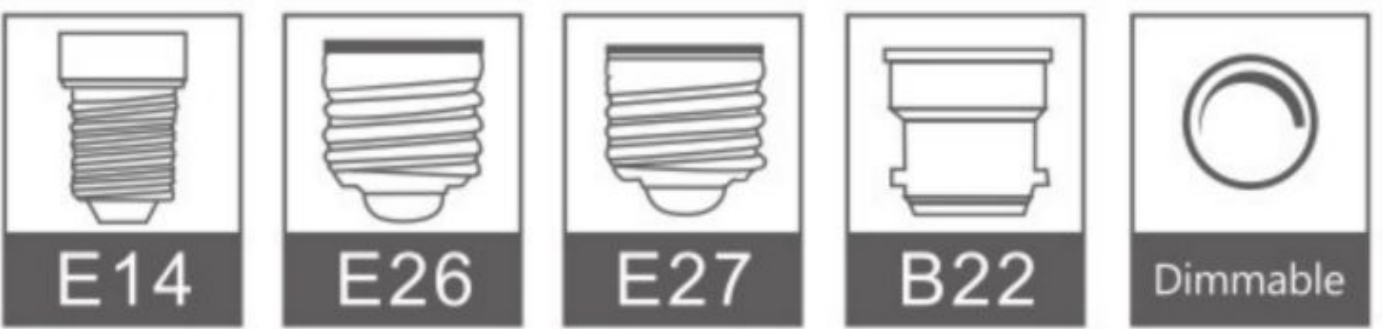


Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	Im	K			W		W
220-240 110-130	2	200±10%	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75



LED FILAMENT LAMP

All items can be with straight/soft led filament

T30

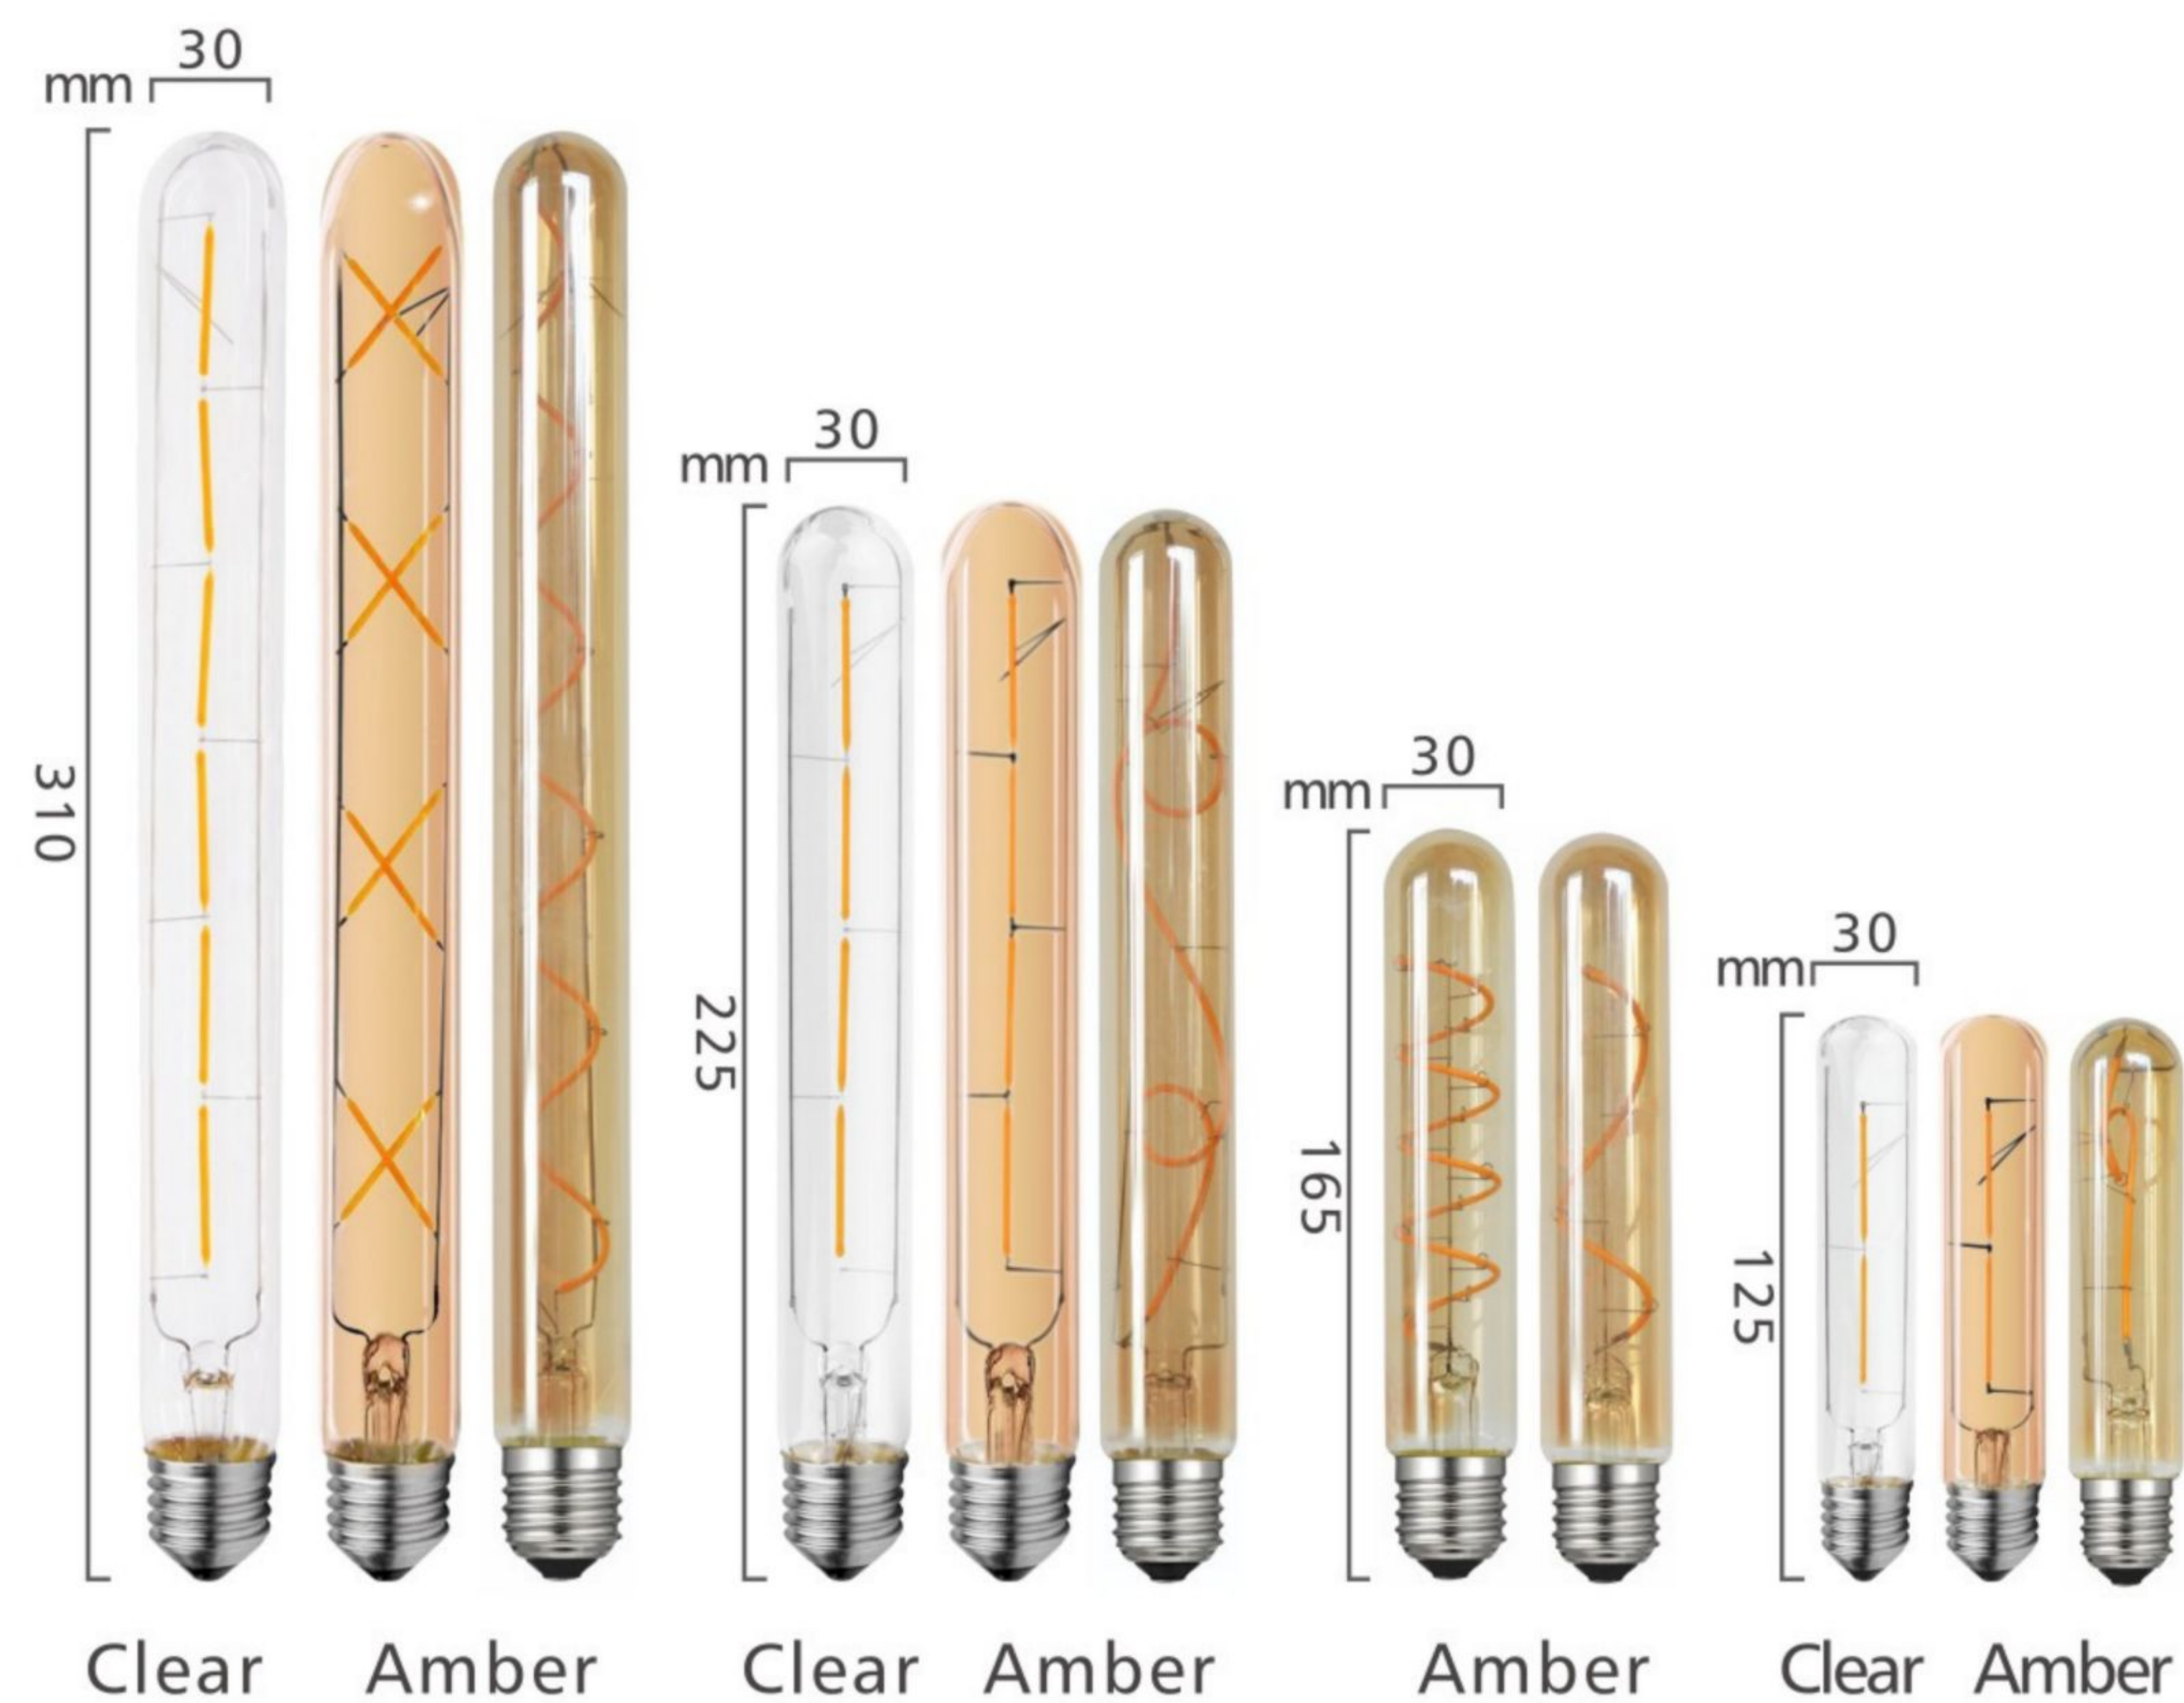

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200±10%	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	3	200±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	25
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45



STAR-3D



ZS95-3D

3D Glass series



Voltage	Watts	Lumino us Flux	CCT	Angle	Type /pcs	Power Factor	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600	2000/2700 4000/6500	360°	Filament /6	0.5	80	60



A60-3D



G80-3D



ST64-3D



G95-3D



JZ125-3D



LED FILAMENT LAMP

All items can be with straight/soft led filament

Smoky LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80




R140
D140x175mm

HP140
D140x210mm

PG120
D120x195mm

NGN125
D125x175mm

ST110/130
D110x220mm
D130x240mm

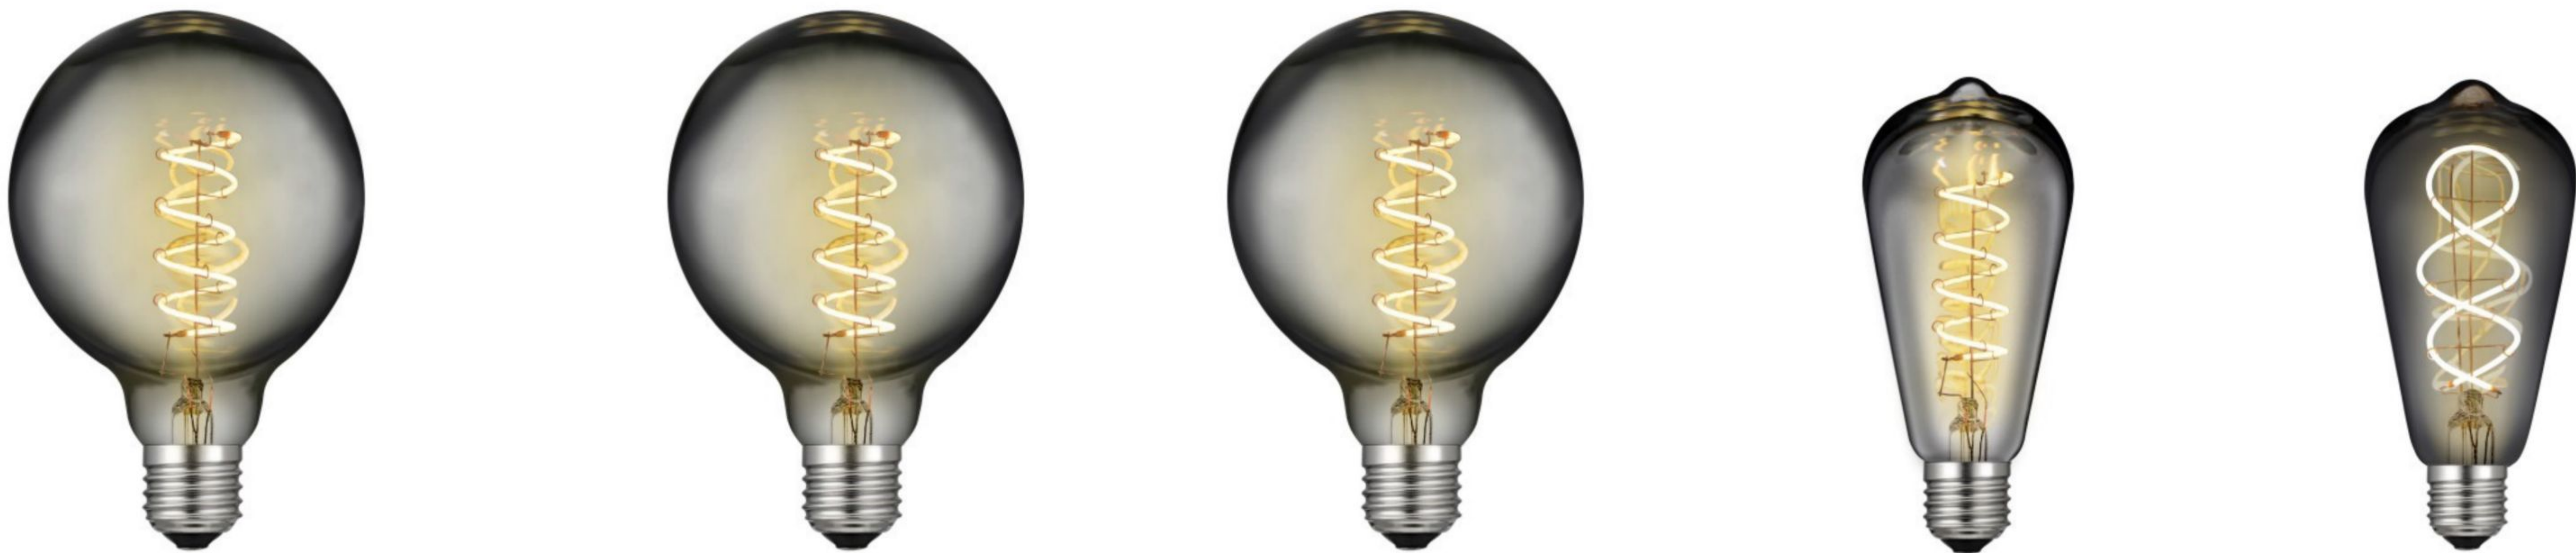

G125
D125x175mm

G95
D95x136mm

G80
D80x117mm

ST64
D64x143mm

ST64
D64x143mm




LED FILAMENT LAMP

All items can be with straight/soft led filament


Smoky LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80

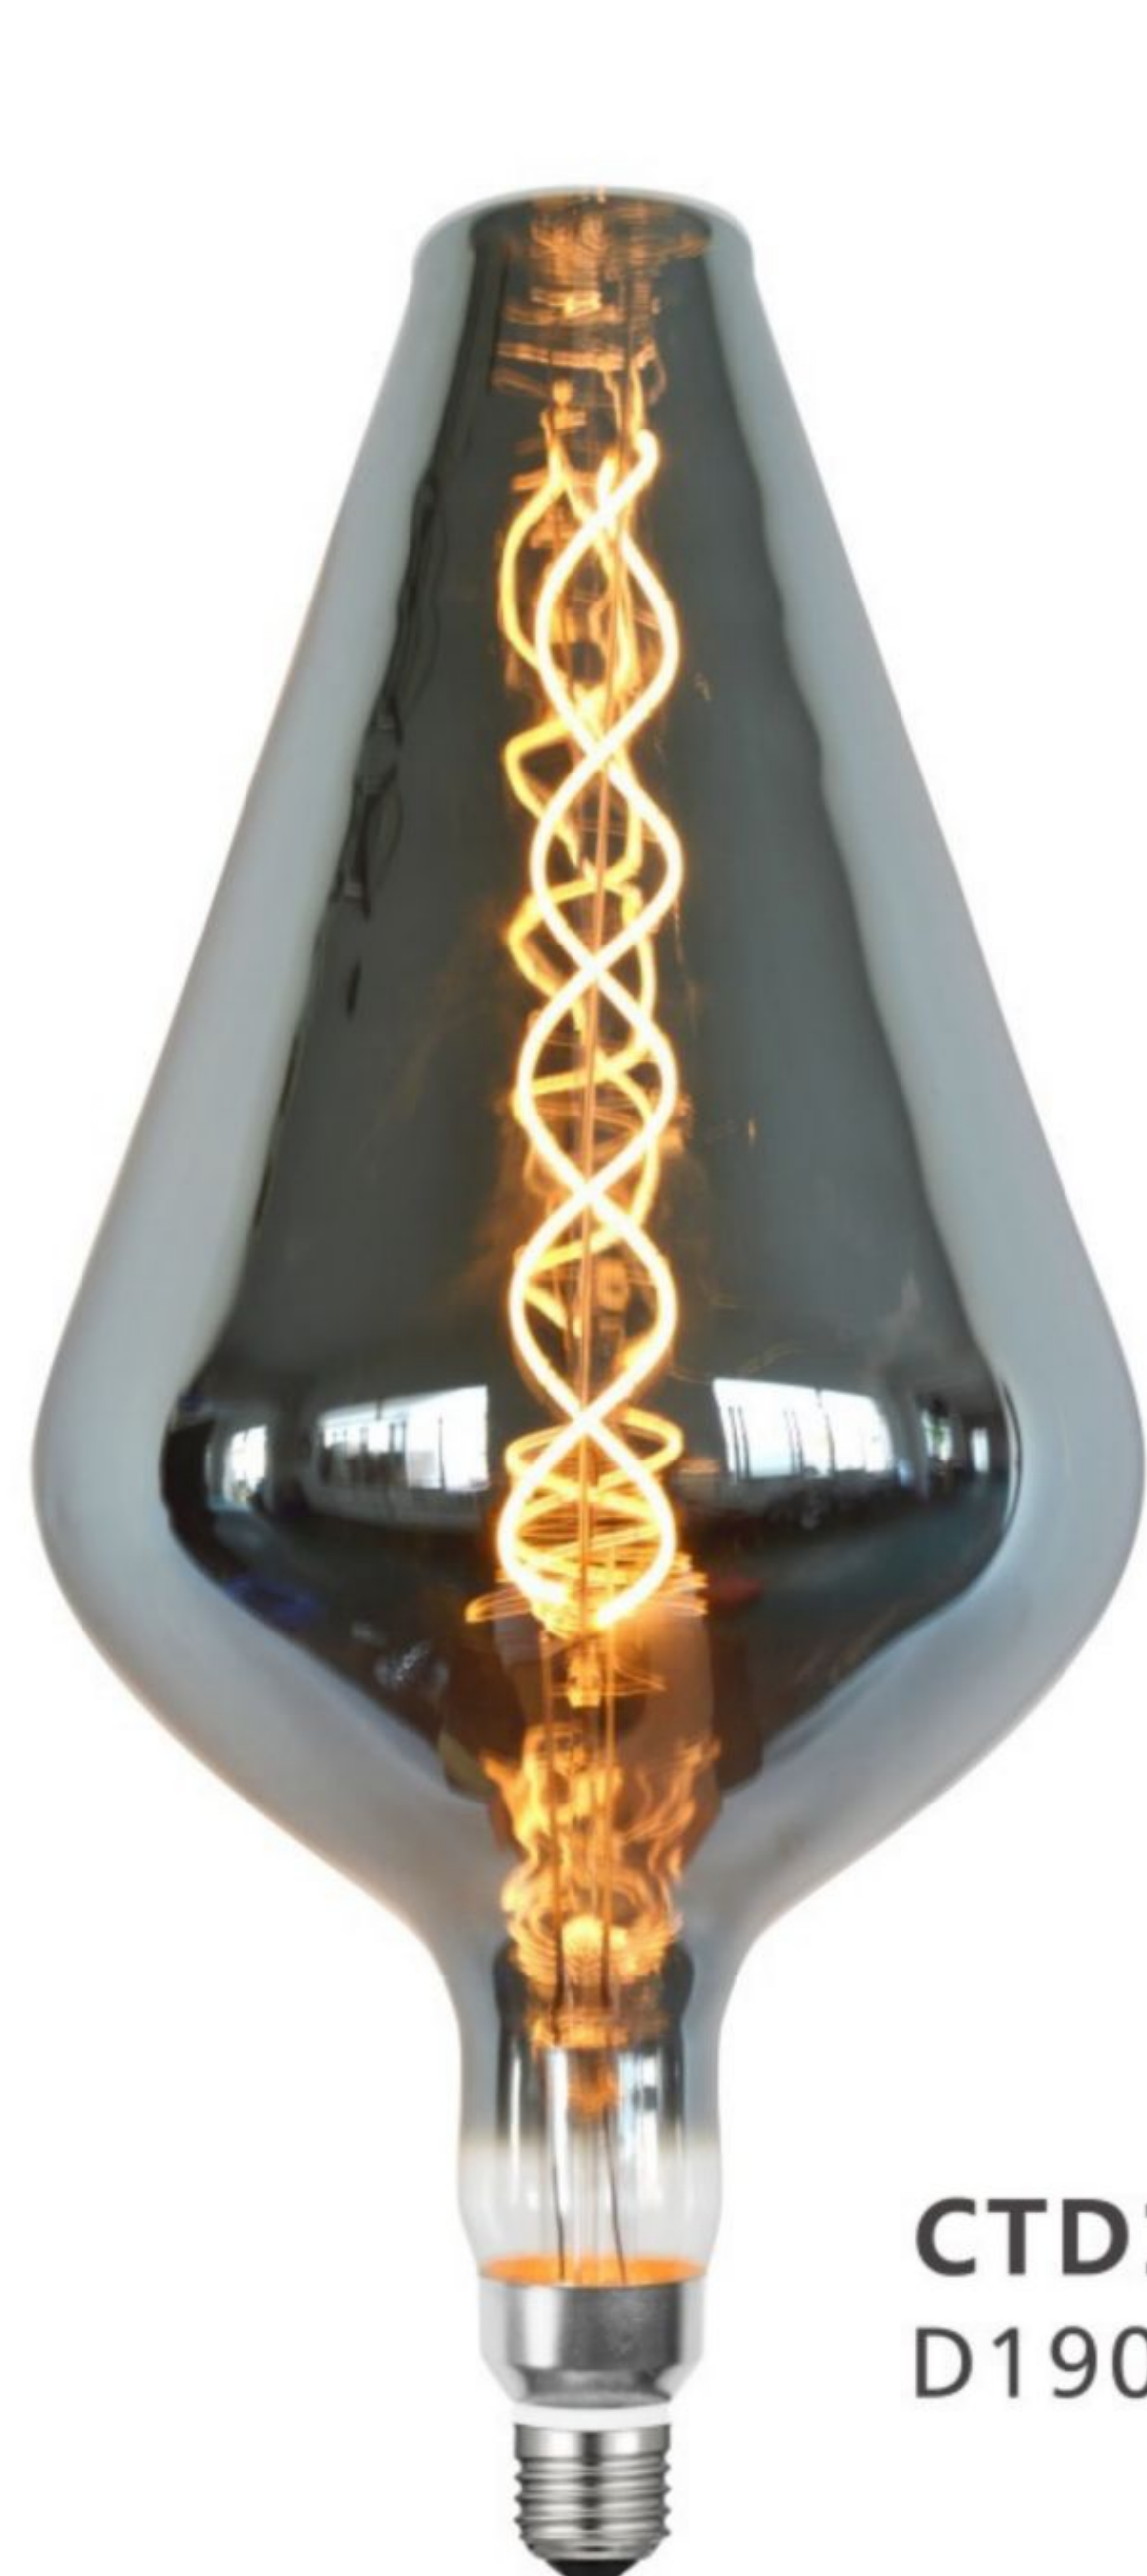

CTD190
D190x410mm

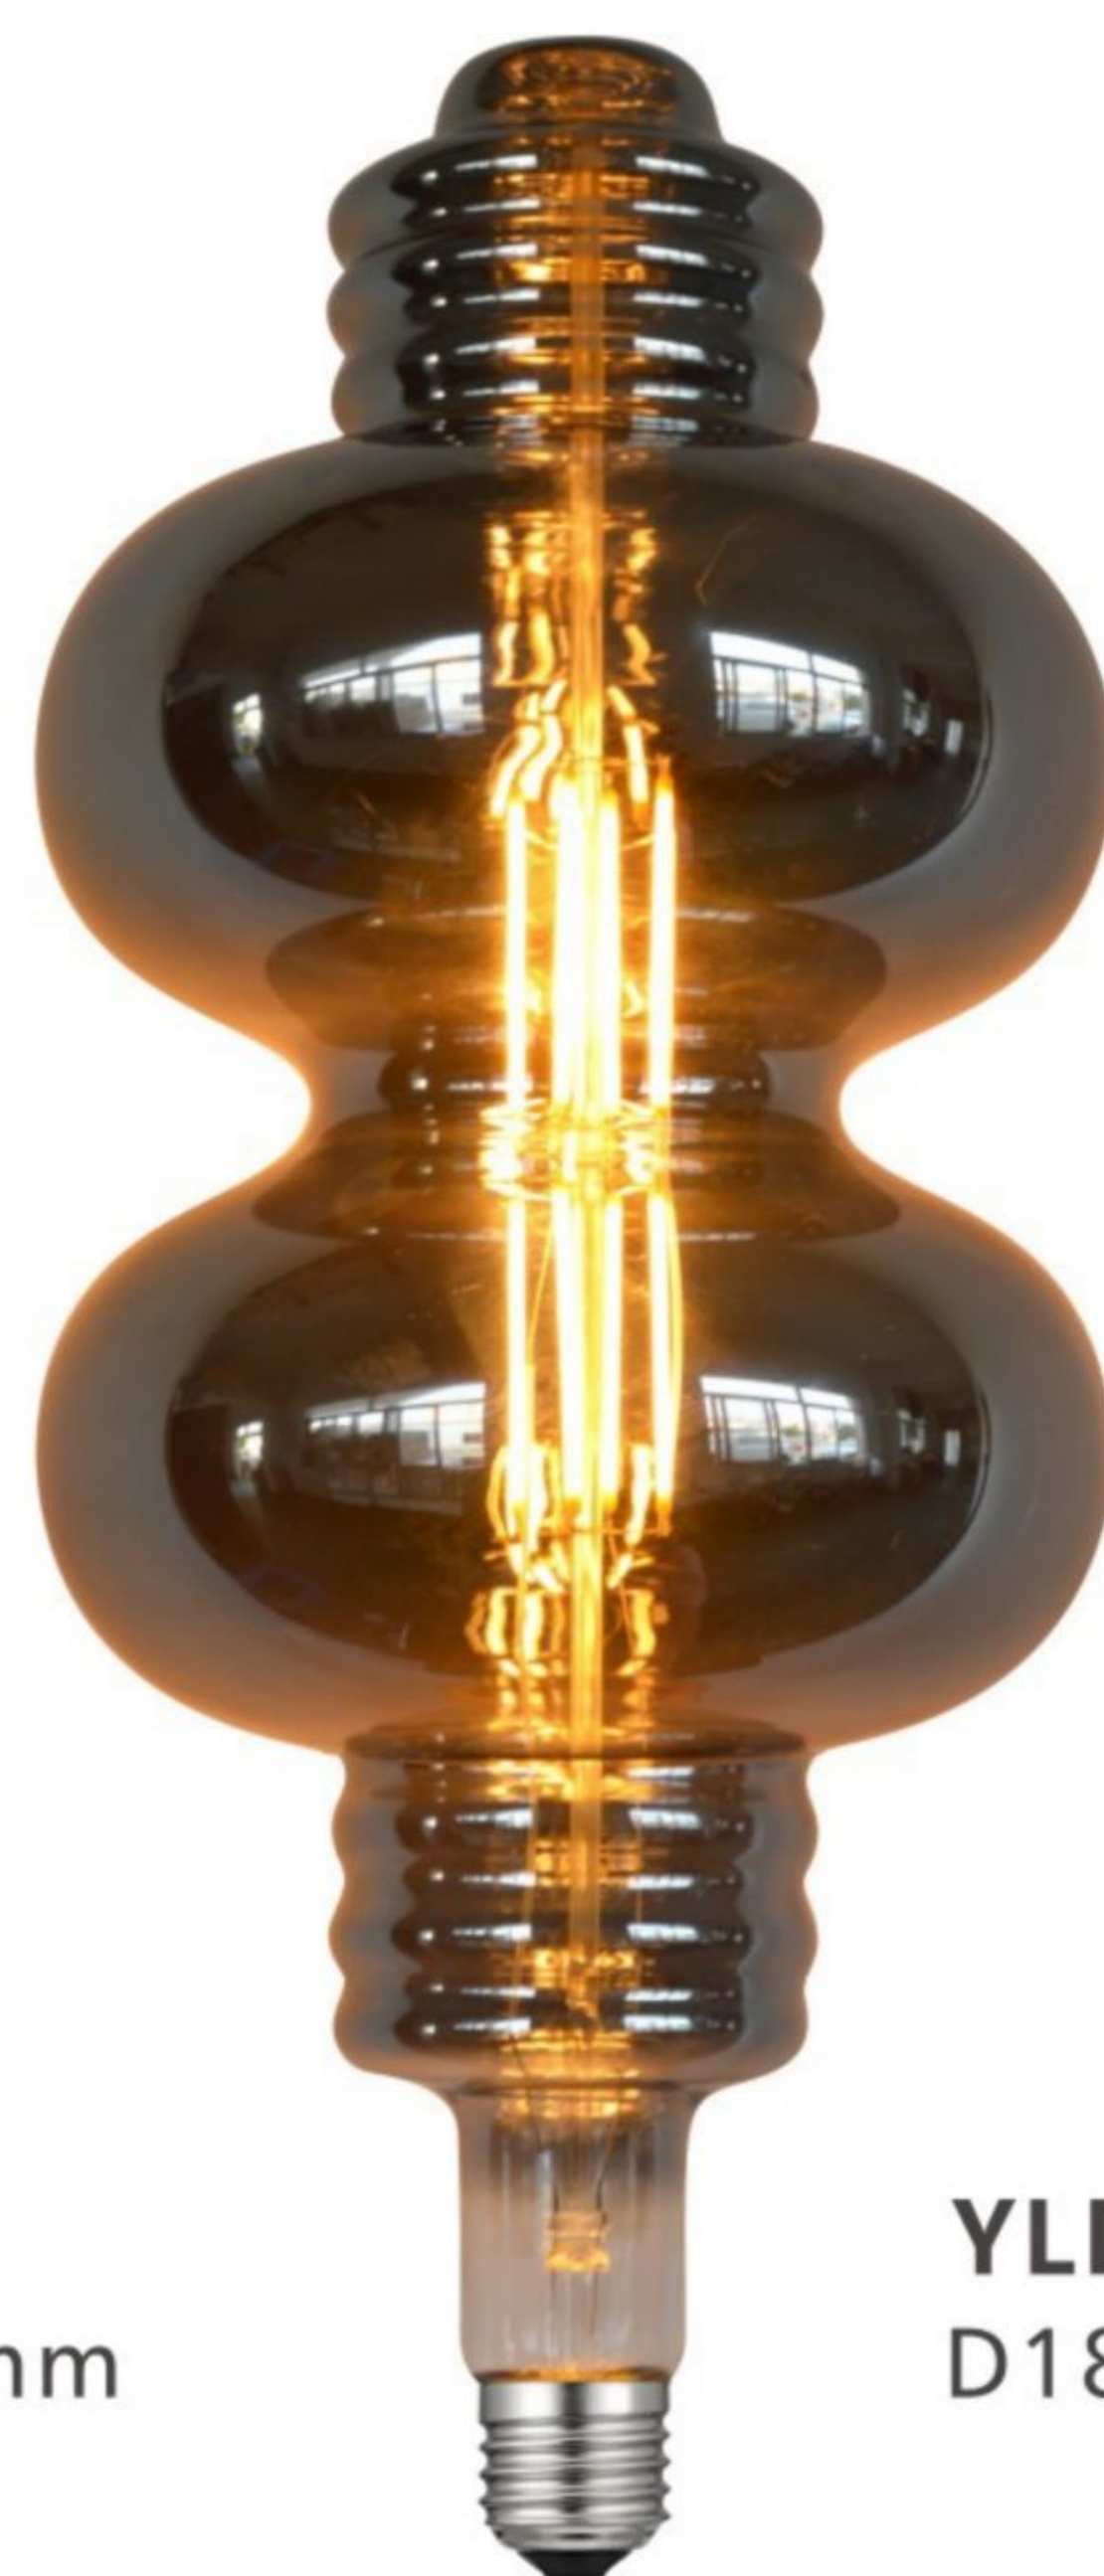

YLD180
D180x420mm



HL180
D180x400mm



CTD175
D175x345mm



G180
D180x240mm



G200
D200x280mm



BT180
D180x345mm




BT180
D180x345mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

Smoky LAMP

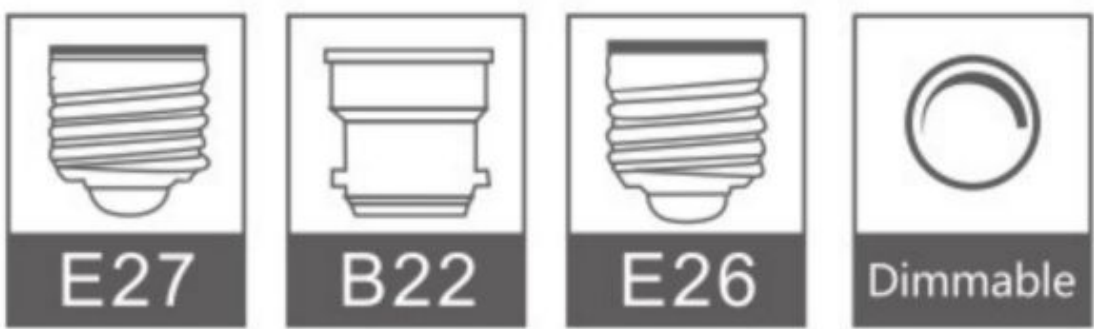

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



STN180
D180x290mm



STN160
D160x270mm



HL145
D145x260mm



TT75
D75x335mm



CT120
D120x430mm



ST160
D160x270/290/310mm



PG180
D180x280mm



DP250
D250x225mm



MG200
D200x160mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



CT120
D120x430mm



CM140
D140x245mm



CM95
D95x180mm



HEART
140x65x155mm



TZ72
D72x155mm



TZ95
D95x230mm



TT75
D75x335mm



GL100
D100x265mm



JP80
D80x330mm



GN150
D150x240mm



G200
D200x280mm



G380
D380x500mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



R180
D180x280mm



HL145
D145x260mm



R240
D240x335mm



HI135
D135x315mm



SDS90
D90x240mm



CTD190
D190x410mm



PTC
D205x420mm



PTC
D205x420mm



HL180
D180x400mm



HL115
D115x280mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



STN180
D180x290mm



STN160
D160x270mm



FDP200
D200x175mm



FDY200
D200x175mm



ST160
D160x270mm



ST130
D130x300mm



FDP200
D200x175mm



FDY200
D200x175mm



ST160
D160x270/290/310mm





LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200±10%	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	3	200±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	25
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45



ZS80
D80x105mm

LF95
D95x145mm

NG95
D95x145mm

BL95
D95x145mm

G95
D95x145mm

ST95
D95x180mm

LF125
D125x165mm

ZS95
D95x135mm

GJ110
D110x175mm

BT75
D75x165mm


STAR
D140x60X190mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP

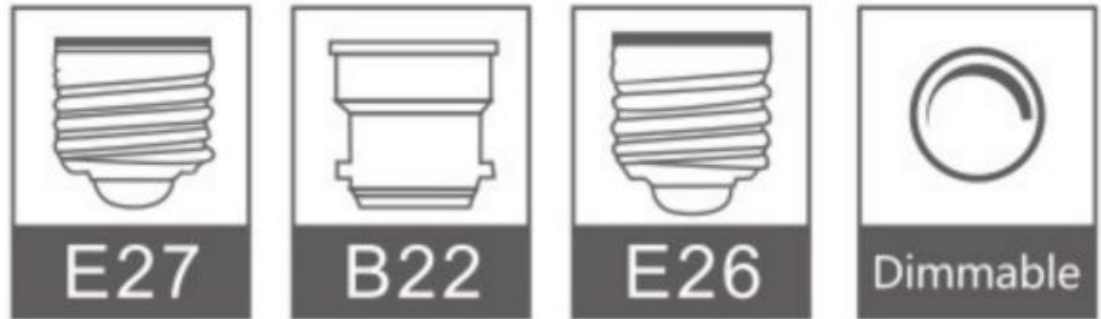

Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	2	200±10%	2000/2700 4000/6500	360°	Filament /2	0.5	80	20
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	3	200±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	25
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45



DL125
D125x180mm



CM95
D95x180mm



YM95
D95x180mm



SL80
D80x128mm



LJ95
D95x145mm



A60
D60x105mm

G80L
D80x165mm



ZD65
D65x190mm



GZ95
D95x145mm



GZ125
D125x175mm



ZQ125
D125x165mm



SG75
D75x175mm



LED FILAMENT LAMP

All items can be with straight/soft led filament

AMBER LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45
220-240 110-130	10	700±10%	2000/2700 4000/6500	360°	Soft Filament /2	0.5	80	80



CTD130
D130x320mm



CTD130
D130x320mm



HL130
D130x290mm



HL130
D130x290mm



JP70
D70x280mm



JP70
D70x280mm



HP115
D115x330mm



HP115
D115x330mm



KLT220
D220x280mm



KLT220
D220x280mm



KLT220
D220x280mm



LED FILAMENT LAMP

All items can be with straight/soft led filament



LED LAMP



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45

Half matt black



G125
D125x175mm



G95
D95x136mm



G80
D80x117mm



G60
D60x115mm



G45(E14/27)
D45x76/72mm



NEW LED BULB



G60_5w
D60x115mm



G80_7w
D80x117mm



G95_7w
D95x136mm



G125_9w
D125x175mm

Milky glass color
SMD 2835 LED CHIP
360° Beam angle



LED FILAMENT LAMP

All items can be with straight/soft led filament



COLOR GLASS



Voltage	Watts	Lumen	CCT	Beam Angle	Type /pcs	PF	CRI	Compare Incandescent Wattage
V	W	lm	K			W		W
220-240 110-130	4	400±10%	2000/2700 4000/6500	360°	Filament /4	0.5	80	40
220-240 110-130	6	600±10%	2000/2700 4000/6500	360°	Filament /6	0.5	80	60
220-240 110-130	8	800±10%	2000/2700 4000/6500	360°	Filament /8	0.5	80	75
220-240 110-130	12	1000±10%	2000/2700 4000/6500	360°	Filament /12	0.5	80	100
220-240 110-130	5	350±10%	2000/2700 4000/6500	360°	Soft Filament /1	0.5	80	45



ZS110
D110x175mm



LF125
D125x175mm



CM95
D95x180mm



LF95
D95x145mm



ST64-S
D64x143mm



ZS95-S
D95x135mm



G125-S
D125x175mm



HEART
140x65x155mm